




塑封肖特基二极管

反向电压 40 ~ 200 V

正向电流 2.0 A

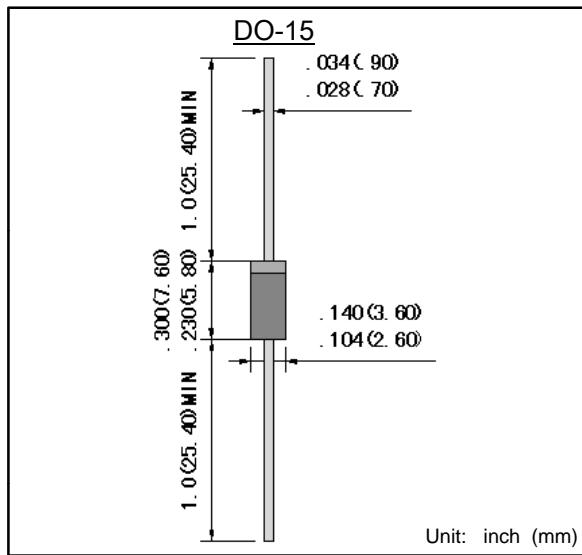

Schottky Barrier Plastic Rectifiers

Reverse Voltage 40 ~ 200 V

Forward Current 2.0 A

特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒, 引线长度:0.375" (9.5mm)  
260°C/10seconds,9.5mm lead length
- 引线和管体皆符合RoHS标准  
Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品  
Green compound with suffix "-F" on Marking

机械数据 Mechanical Data

- 封装外形:DO-15 塑封 Case:DO-15 Molded plastic
- 环氧树脂 : UL易燃等级 : 94V-0  
Epoxy: UL 94V-0 rate flame retardant
- 引脚 : 镀锡,无铅 Lead: Pure tin plated, lead free

**最大值和特性** TA = 25°C 除非另有规定。

Maximum Ratings & Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

| 参数<br>Parameter  | 符号<br>Symbols   | SR<br>240    | SR<br>260 | SR<br>2100   | SR<br>2150 | SR<br>2200 | 单位<br>Unit    |
|--|-----------------|--------------|-----------|--------------|------------|------------|---------------|
| 最大可重复峰值反向电压<br>Maximum repetitive peak reverse voltage   | $V_{RRM}$       | 40           | 60        | 100          | 150        | 200        | V             |
| 最大均方根电压 Maximum RMS voltage  | $V_{RMS}$       | 28           | 42        | 70           | 105        | 140        | V             |
| 最大直流阻断电压<br>Maximum DC blocking voltage  | $V_{DC}$        | 40           | 60        | 100          | 150        | 200        | V             |
| 最大正向平均整流电流<br>Maximum average forward rectified current  | $I_{F(AV)}$     |              |           | 2.0          |            |            | A             |
| 正向不重复浪涌电流 8.3 ms单一正弦半波<br>Non-repetitive peak forward surge current<br>8.3 ms singlehalf sine-wave | $I_{FSM}$       |              |           | 50           |            |            | A             |
| 最大正向电压 @IF=2.0A<br>Maximum forward voltage   | $V_F$           | 0.50         | 0.70      | 0.85         | 0.92       | 0.95       | V             |
| 最大反向电流 @ $V_{DC}$ TA= 25°C<br>Maximum reverse current TA= 100°C                                    | $I_R$           | 100          | 20        | 50           | 10         |            | $\mu$ A<br>mA |
| 典型热阻 Typical thermal resistance (Note 1)   | $R_{\theta JA}$ |              |           | 55           |            |            | °C/W          |
| 典型结电容 VR=4.0V,f=1MHz<br>Type junction capacitance  | $C_J$           |              |           | 130          |            |            | pF            |
| 工作结温和存储温度<br>Operating junction and storage temperature rang                                       | $T_J, T_{STG}$  | -55 --- +125 |           | -55 --- +150 |            |            | °C            |

备注 Note:

1) 引线长度 0.375" (9.5 mm) , 安装在PCB板上 , 从PN结到周围环境的热阻。


1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, PCB mounted.



## 特性曲线 Characteristic Curves


正向特性曲线 (典型值)

TYPICAL FORWARD CHARACTERISTIC

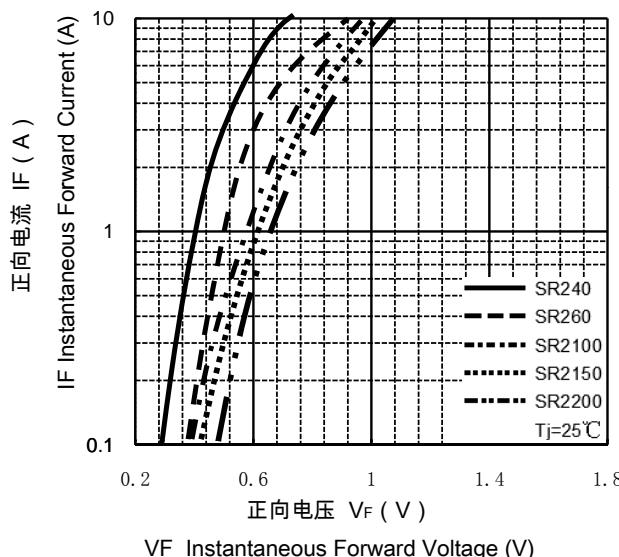

正向电流降额曲线


FORWARD CURRENT DERATING CURVE

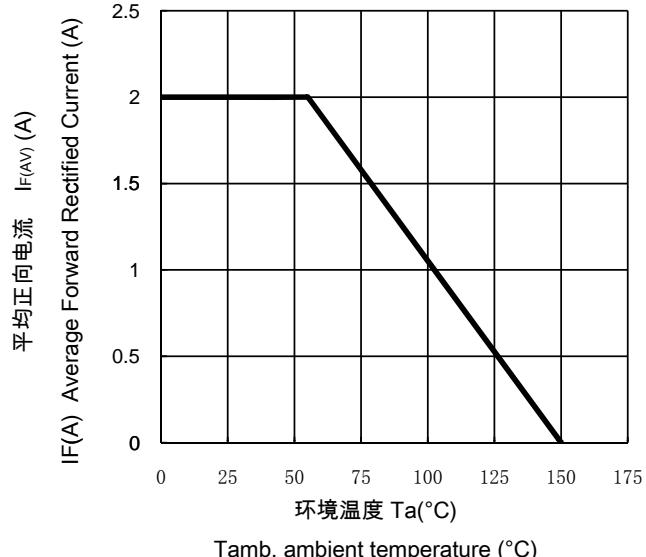

浪涌特性曲线 (最大值)

MAXIMUM NON REPETITIVE

PEAK FORWARD SURGE CURRENT

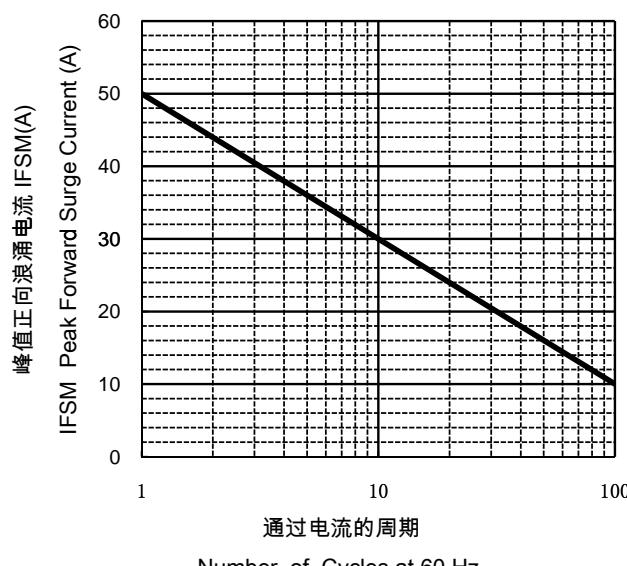

反向特性曲线

Typical Reverse Characteristics

