




表面安装肖特基二极管

反向电压 20 ~ 200 V

正向电流 3.0 A

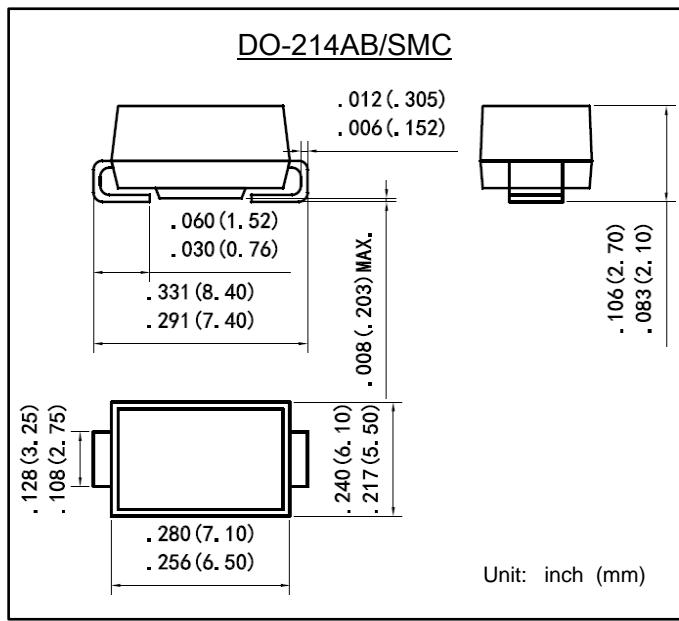

Surface Mounted Schottky Barrier Rectifiers

Reverse Voltage 20 ~ 200 V

Forward Current 3.0 A

特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed: 260°C/10 秒 260°C/10seconds
- 引线和管体皆符合RoHS标准 Lead and body according with RoHS standard

机械数据 Mechanical Data

- 封装外形:DO-214AB塑封 Case:DO-214AB Molded plastic
- 环氧树脂 : UL易燃等级 : 94V-0 Epoxy: UL 94V-0 rate flame retardant
- 引脚 : 镀锡,无铅 Lead: Pure tin plated, lead free
- 高可靠性等级High reliability grade (AEC Q101 qualified)
- 通过 IATF16949体系认证Accreditation through IATF16949 System

最大值和特性 TA = 25°C 除非另有规定。

Maximum Ratings & Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	SS32-Q	SS33-Q	SS34-Q	SS35-Q	SS36-Q	SS38-Q	SS310-Q	SS315-Q	SS320-Q	单位 Unit				
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	V				
最大均方根电压 Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	V				
最大直流阻断电压 Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	V				
最大正向平均整流电流 Maximum average forward rectified current	I _{F(AV)}	3.0								A					
正向不重复浪涌电流 8.3 ms单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave	I _{FSM}	100								A					
最大正向电压 @IF=3.0A Maximum forward voltage	V _F	0.55		0.70		0.85		0.95		V					
最大反向电流 @V _{DC} TA= 25°C Maximum reverse current TA= 100°C	I _R	0.5				0.1				mA					
		20				10									
典型热阻 Typical thermal resistance (Note 1)	R _{θJA} R _{θJL}	60 15								°C/W					
典型结电容 VR=4.0V,f=1MHz Type junction capacitance	C _J	180								pF					
工作结温 Operating junction	T _J	-55 --- +125				-55 --- +150				°C					
存储温度 Storage temperature rang	T _{STG}	-55 --- +150								°C					

备注 Note:

1) 安装在PCB板上，从PN结到周围环境的热阻。


1) Thermal resistance from junction to ambient , PCB mounted.



特性曲线 Characteristic Curves


正向特性曲线 (典型值)

TYPICAL FORWARD CHARACTERISTIC

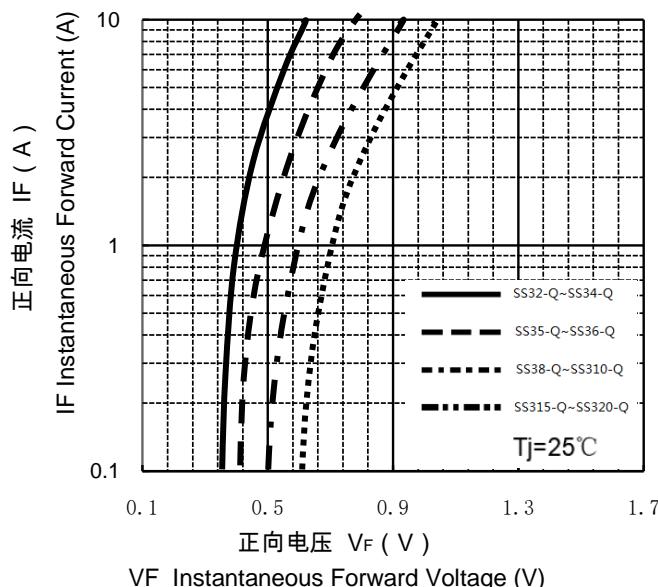

正向电流降额曲线


FORWARD CURRENT DERATING CURVE

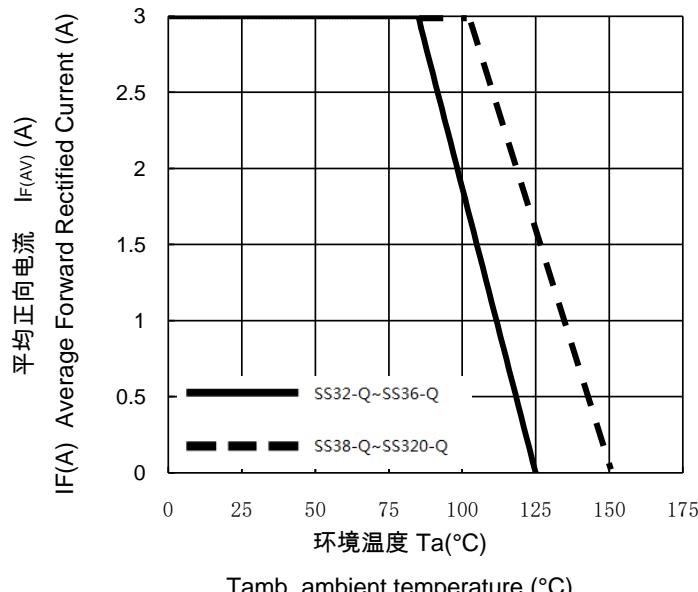

浪涌特性曲线 (最大值)

MAXIMUM NON REPETITIVE


PEAK FORWARD SURGE CURRENT

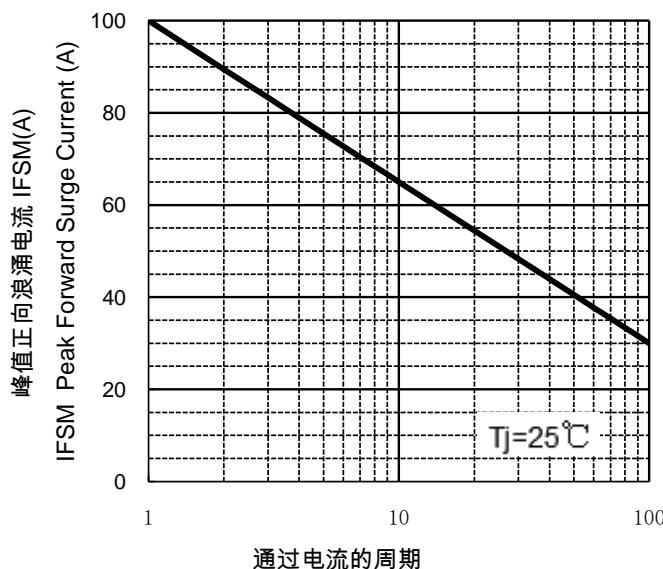

Number of Cycles at 60 Hz.

反向特性曲线

Typical Reverse Characteristics

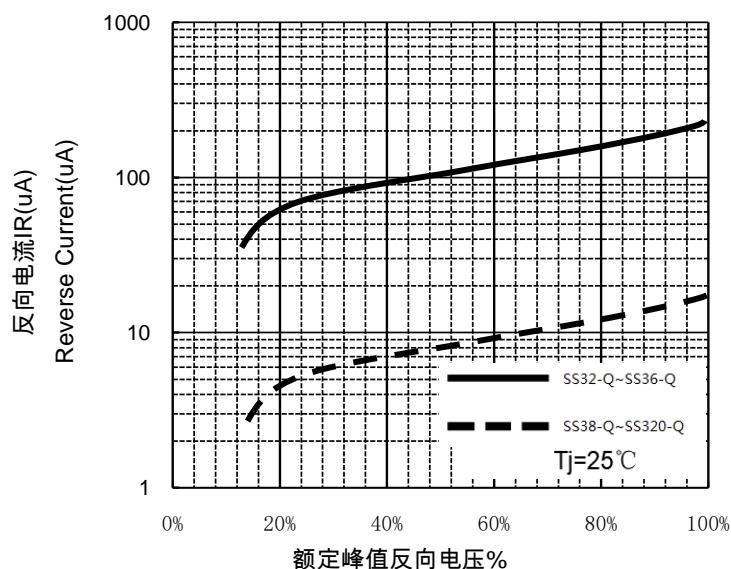

Percent Of Rated Peak Reverse voltage %