




表面安装肖特基二极管
反向电压 20 ~ 100 V
正向电流 8.0 A

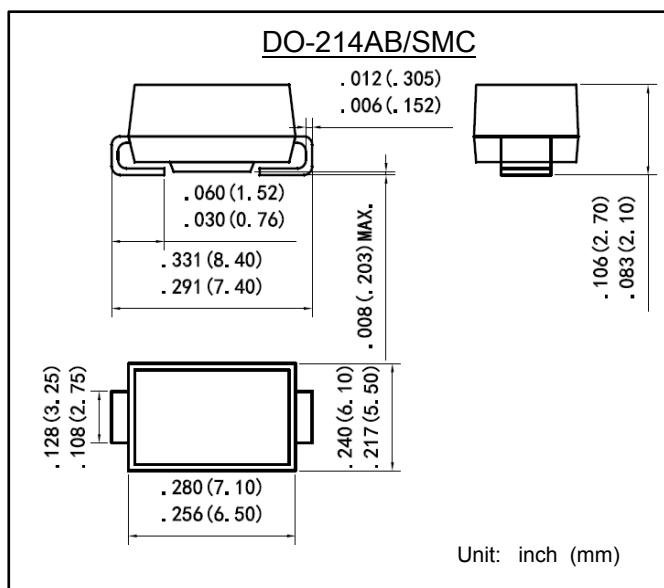

Surface Mounted Schottky Barrier Rectifiers

Reverse Voltage 20 ~ 100 V

Forward Current 8.0 A

特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed:
260°C/10 秒
260°C/10 seconds
- 引线和管体皆符合RoHS标准 Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品 Green compound with suffix "-F" on Marking

机械数据 Mechanical Data

- 封装外形:DO-214AB塑封 Case:DO-214ABMolded plastic
- 环氧树脂 : UL易燃等级 : 94V-0
Epoxy: UL 94V-0 rate flame retardant
- 引脚 : 镀锡,无铅 Lead: Pure tin plated, lead free
- 体系 : 通过IAFT-16949体系认证 System: Accreditation through IATF16949 System
- 高可靠性等级 (AEC Q101合格) High reliability grade (AEC Q101 qualified)

最大值和特性 TA = 25°C 除非另有规定。

Maximum Ratings & Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	SS82 -Q	SS83 -Q	SS84 -Q	SS85 -Q	SS86 -Q	SS87 -Q	SS88 -Q	SS89 -Q	SS810 -Q	单位 Unit			
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	70	80	90	100	V			
最大均方根电压 Maximum RMS voltage	V _{RMS}	14	21	28	35	42	49	56	63	70	V			
最大直流阻断电压 Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	70	80	90	100	V			
最大正向平均整流电流 Maximum average forward rectified current	I _{F(AV)}	8.0									A			
正向不重复浪涌电流 8.3 ms单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave	I _{FSM}	200									A			
最大正向电压 @IF=8.0A Maximum forward voltage	V _F	0.55		0.70		0.85				V				
最大反向电流 @V _{DC} TA= 25°C Maximum reverse current TA= 100°C	I _R	0.5 20			0.1 10			mA						
典型热阻 Typical thermal resistance (Note 1)	R _{θJA} R _{θJL}	90 25									°C/W			
典型结电容 VR=4.0V,f=1MHz Type junction capacitance	C _J	400									pF			
工作结温 Operating junction	T _J	-55 --- +125				-55 --- +150				°C				
存储温度 Storage temperature rang	T _{STG}	-55 --- +150									°C			

备注 Note:

1) 安装在PCB板上，从PN结到周围环境的热阻。

1) Thermal resistance from junction to ambient , PCB mounted.



特性曲线 Characteristic Curves

